
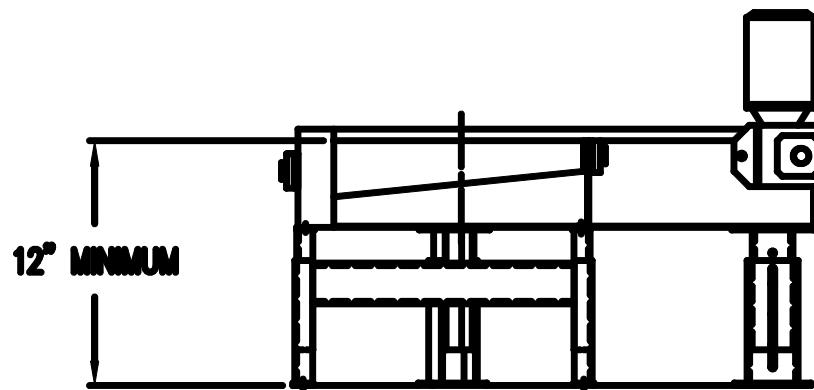


## Model 426 90° Powered Belt Curve Conveyor

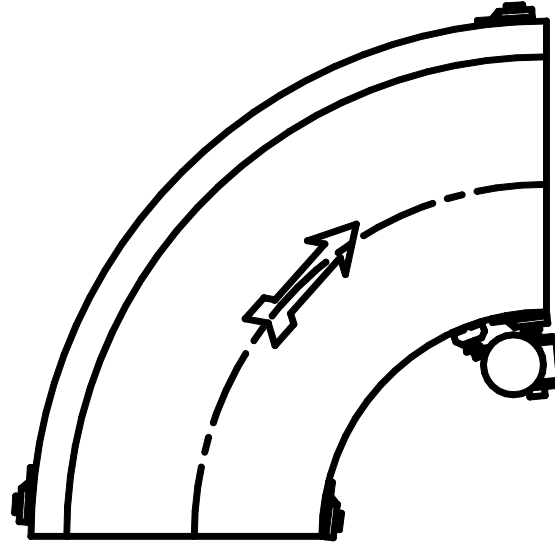

Model	Width
Model 426A	25"
Model 426B	29"

### STANDARD SPECIFICATIONS

- **FRAME:** Slider Bed of Fabricated Steel, Deep Box Construction, Open Bottom, 12 Gauge Steel
- **SUPPORTS:** Heavy Duty Welded 4" Structural Steel Channel with Adjustable Feet for  $\pm 3"$
- **BELT:** Black Nitrile Friction Surface x Friction Surface, 120 P.I.W.
- **ROLLERS:** End Rolls of Formed, Tapered 14 or 12 Gauge Steel and Sprocket Driven by Single Strand #50 Sidebow Roller Chain with Special attachments to the Belt  
Idle Rollers Rubber Covered with sealed for Life Bearings
- **SPROCKETS:** Nylatron End Roll Sprockets are Impregnated for up to 40% Increased Operating Life
- **MOTOR:** 230/460V-3PH-60HZ T.E.F.C.
- **SPEED:** 65, 80 or 100 FPM Standard
- **FINISH:** Powder Coating, Color: Westfalia Gray RAL #7040