


Model 943

Shuttle Unit – Three Strand Chain Pallet Conveyor

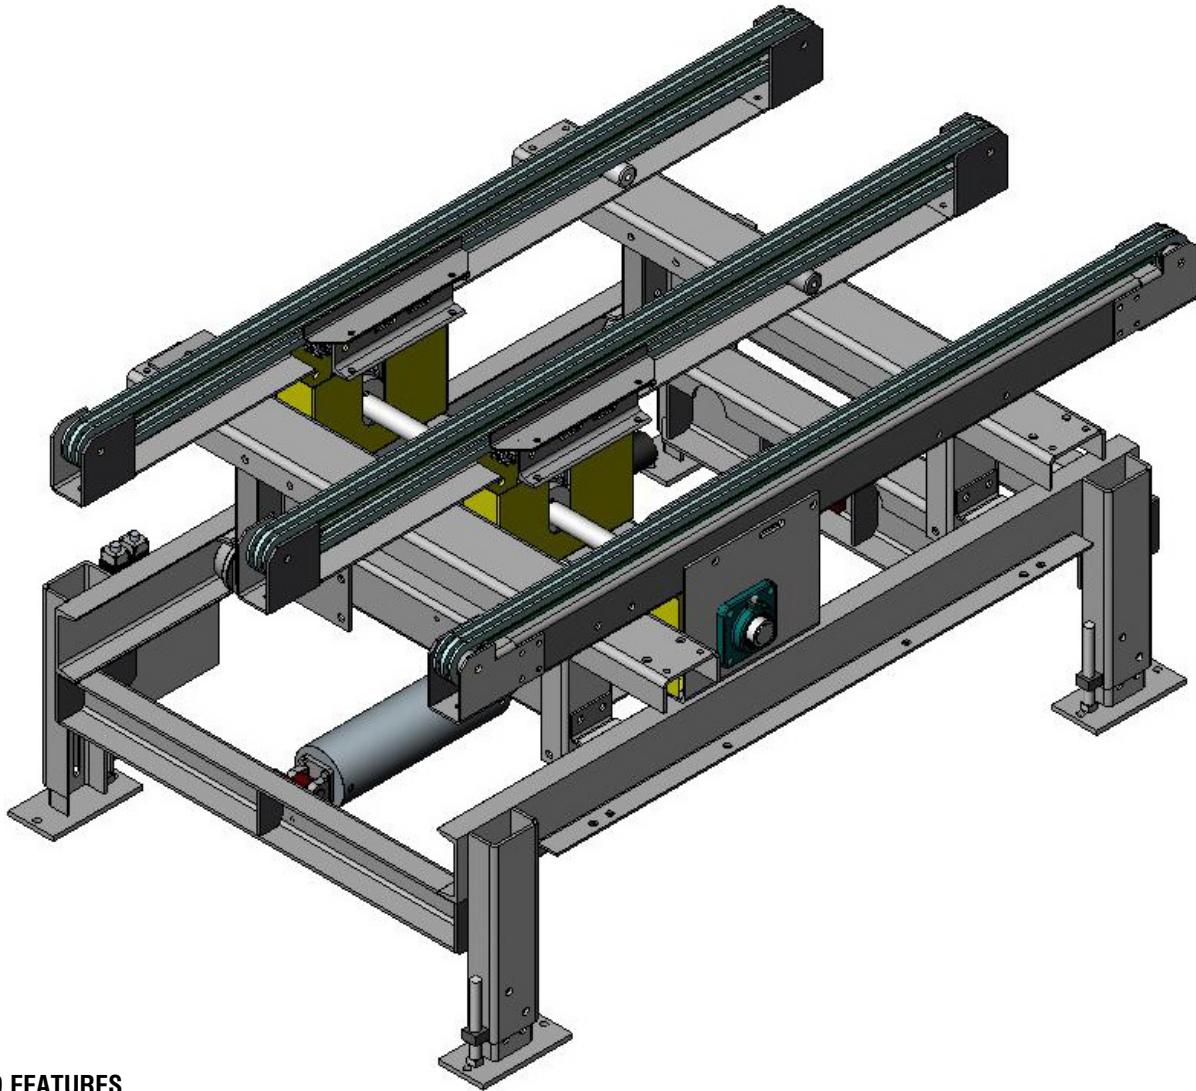

STANDARD FEATURES

- Utilized for Shuttling/Conveying Pallet(s) in Direction of Flow from Conveyor to Conveyor

STANDARD SPECIFICATIONS

- FRAME: 7 Gauge Formed Channel Steel
- SUPPORTS: Heavy Duty Formed Steel Channel Floor Supports; 28" Minimum, 48" Maximum
- CHAIN: Model A - #60 Roller Chain on UHMW Extrusion Wearstrip (Model 938)
Model B - Double #50 Chain on UHMW Extrusion Wearstrip (Model 939)
- MOTOR: 230/460V-3PH-60HZ T.E.F.C.
- SPEED: 40, 60 or 80 FPM Standard for Conveyor
- SHUTTLE SPEED: 40 FPM Standard, Air Actuated
- PALLET SIZE: 40" x 48" Standard
- LOAD CAPACITY: 3,500 Lbs.
- FINISH: Powder Coating, Color: Westfalia Gray RAL #7040