


Model 435 In-Line Knock-Down Turner

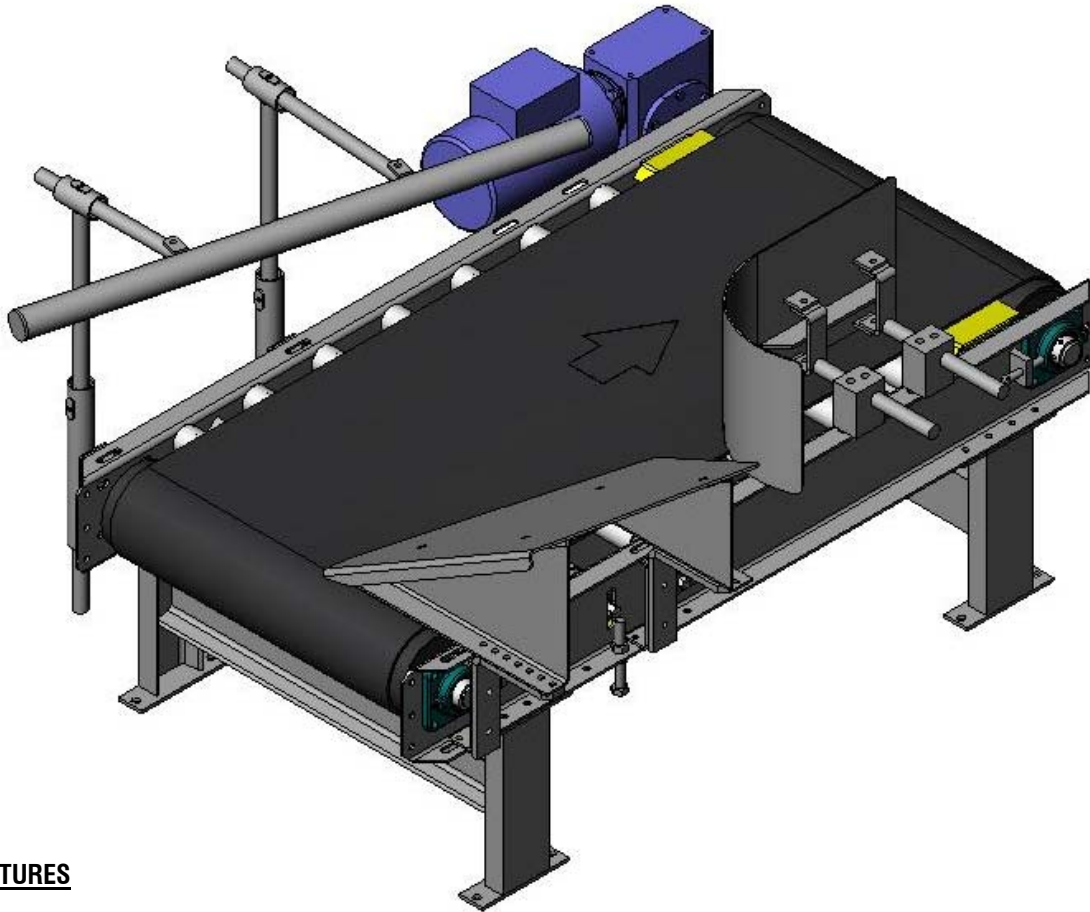

STANDARD FEATURES

- Knocks Down Standing Bags and Rotates 45° for Butt First Transport
- Bag Knock-Down Bar and Turning Plate are Adjustable

STANDARD SPECIFICATIONS

- FRAME: 7 Gauge Formed Steel Channel
- SUPPORTS: Heavy Duty Welded 4" Steel Channel with Adjustable Feet for $\pm 3"$
- ELEVATION TOP OF BELT: 15" Minimum
- BELT: 24" Wide Black Interwoven Polyester with PVC Cover, V-Guided Belt
- ROLLERS: 1.9" Diameter Rollers with Ball Bearings, 7/16" Diameter Shaft, Nominally Spaced on 6" Centers
- KNOCK-OVER DEVICE: Roll Over Bar, Fully Adjustable in 3-Axis
Optional: Pneumatic Pusher with Photo-Eye and Solenoid
- PULLEYS: 6" Diameter Crown Face Feed End Pulley
6" Diameter Crown Face Lagged Head End Pulley
- MOTOR: 230/460V-3PH-60HZ T.E.F.C.
- SPEED: 50, 60, 75 or 100 FPM Standard
- FINISH: Powder Coating, Color: Westfalia Gray RAL #7040